

# GIUSEPPE

## FLOODLIGHT



Square floodlight with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included or provided with 2x E27 lampholders. Motion sensor version available. Insulation class II, Protection rating IP66.



*Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto e a palo. Fornito con include lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*




4P2.000.D4K

**CCT SETTABLE**

2700 K 3000 K 4000 K 6500 K

SDCM <6



**GIUSEPPE - COMPONENTS**

IP 66



**COVER** with no visible screws, made of shockproof resin material, UV-rays stabilized.

**COVER** senza viti a vista in resina antiurto stabilizzata ai raggi UV.

**DIFFUSER** made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

**DIFFUSORE** realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

**BODY** made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

**CORPO** realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

**GIUSEPPE**



**Dimensions and weight**

Height: 150 mm  
Width: 300 mm  
Weight: 2,8 Kg

**Moulded Colours:**

Black Grey White

**Diffuser PMMA:**

Opal

**LED LAMPS**



Technical details on page 552.

**4x GX53 LED**

FULLY PRE-WIRED




4P2.702

Floodlight supplied **wit white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified long-life efficient and Kelvin settable GX53 LED lamps included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

**100 - 240 V**


\*ADD. SUFFIX

GX53 LED	4x 7W 28W	3200 Lm	6500 K	.C4K
			4000 K	
	4x 10W 40W	4800 Lm	3000 K	.D4K
			6500 K	
			4000 K	
			3000 K	



4x 10W = 100W  
4800 Lm SON-HQI

**SAVE 60%**



CCT SETTABLE

SDCM <6

**GX53 LED**

FULLY PRE-WIRED



4P1.702

Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life and efficient and Kelvin settable GX53 LED lamp in different wattages.

**100 - 240 V**

\*ADD. SUFFIX

GX53 LED	7 W	800 Lm	6500 K	.A1K
			4000 K	
	11 W	1300 Lm	2700 K	.B1K
			6500 K	
			4000 K	
			2700 K	
+ SENSOR	18 W	2000 Lm	6500 K	.E1K
			4000 K	
GX53 LED	7 W	800 Lm	6500 K	.ASK
			4000 K	
	11 W	1300 Lm	2700 K	.BSK
			6500 K	
			4000 K	
			2700 K	
+ SENSOR	18 W	2000 Lm	6500 K	.ESK
			4000 K	
			2700 K	



7W 11W 18W = 60W 100W 150W  
incandesce

**SAVE 90%**

**2x E27**

FULLY PRE-WIRED



4P2.702

Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with 2x E27 lampholders.

Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).


**100 - 240 V**

\*ADD. SUFFIX

2x E27 (CFL-LED)	max 160 mm	.E28
2x E27 + SENSOR	max 160 mm	.ES8

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE






**GIUSEPPE GX53**

<b>7W</b>	4P1.000.A1K
<b>11W</b>	4P1.000.B1K
<b>18W</b>	4P1.000.E1K
<b>28W</b>	4P2.000.C4K
<b>40W</b>	4P2.000.D4K


CCT SETTABLE GX53 LED LAMPS INCLUDED

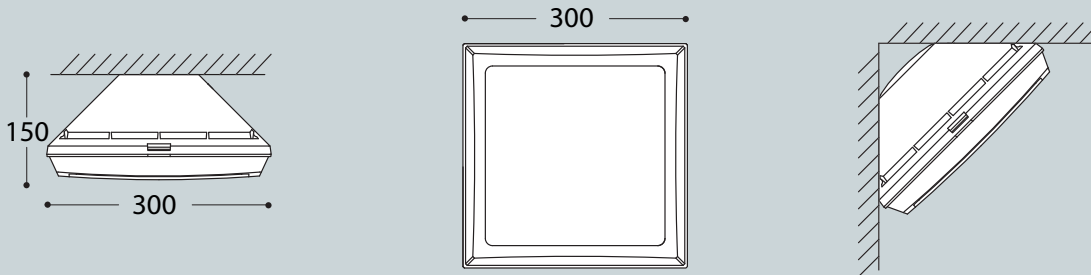

Pcs 10  
Kg 29  
mc 0,195

**GIUSEPPE 2xE27**

<b>2xE27 lampholder</b>	4P2.000.E28
<b>2xE27 with sensor</b>	4P2.000.ES8

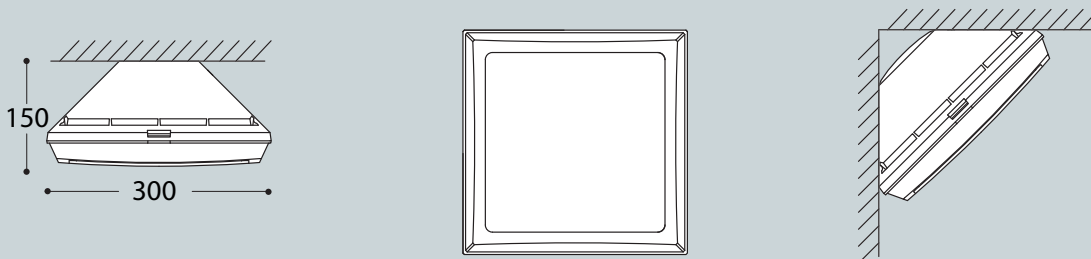

Pcs 10  
Kg 19  
mc 0,195

**BOLLARD VERSION**



Detailed information on page 194.