

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 MODERN

MEDIUM SIZE



Ø 300 mm PMMA globe, complete with modern globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

G31.262

Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito anche completo di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

CE	UV UV-TREATED	CLASS II DOUBLE INSULATION	RESIDENTIAL
RECYCLABLE	ANTI-SHOCK	TEMPERATURE +90° -60°	WALL POST






GLOBE 300 MODERN - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

***GLOBO** Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

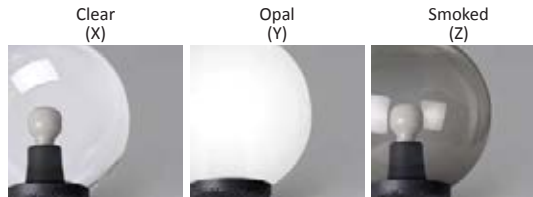

GLOBE BASE with modern design made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

***REGGIBOCCIA** con disegno moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.*

GLOBE 300 MODERN

G31.B30 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:

Black White

Diffuser PMMA:

Clear Opal Smoked

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27
6 W	800 Lm	4000 K	.F1L	.F1R
		2700 K	.M1L	
8 W	1000 Lm	4000 K	.M1L	.M1R
		2700 K	.N1L	
12 W	1500 Lm	4000 K	.N1L	.N1R
		2700 K		



LED LAMPS




Technical details on page 552.

Globe supplied with E27 base. Provided as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.

6W
8W
12W = 60W
75W
100W incandescent

SAVE 90%

PHOTOMETRIC DATA SAMPLE

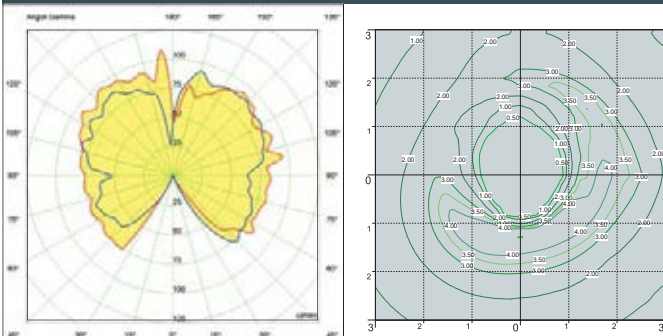

GLOBE 300 MODERN clear with Fumagalli Filament Led Lamp 6W.

POST height 2mt
6x6mt area: average 2,5 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 300 MODERN

MEDIUM SIZE





ILIO/GLOBE 300
G31.251

Pcs 2
Kg 5,7
mc 0,1144

ARGO/G300
G31.241 resin

Pcs 4
Kg 6,7
mc 0,148

FEBO 500/G300
G31.261 resin

Pcs 2
Kg 6
mc 0,117

FEBO 1000/G300
G31.262 resin

Pcs 2
Kg 7,2
mc 0,146

ELISSA 1400/ G300	ELISSA 1900/ G300
G31.280	G31.281
Pcs 2 Kg 9,2 mc 0,200	Pcs 2 Kg 15,9 mc 0,232

FEBO 1500/G300
G31.263

Pcs 2
Kg 13,9
mc 0,178

ORIONE 2450/ G300	ORIONE 2850/ G300
G31.284	G31.285
Pcs 2 Kg 24,7 mc 0,225	Pcs 2 Kg 28,4 mc 0,246

ENE A 2000/ G 300	ENE A 2400/ G 300
G31.264	G31.265
Pcs 2 Kg 22,7 mc 0,171	Pcs 2 Kg 26,4 mc 0,192

ENE A 2000 ELI/G300 3L	ENE A 2400 ELI/G300 3L
G31.264.L30	G31.265.L30
Pcs 2 Kg 36,7 mc 0,400	Pcs 2 Kg 40,4 mc 0,421

ENE A 2000 ELI/ G300 2L	ENE A 2400 ELI/ G300 2L
G31.264.L20	G31.265.L20
Pcs 2 Kg 33,1 mc 0,340	Pcs 2 Kg 36,8 mc 0,361

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES