

# NOVA LUCE

**Supplier's name or trade mark:** NOVA LUCE S.A

**Supplier's address:** SCHIMATARI VIOTIAS 32009, GREECE

**Model identifier:** 9186807

**Type of light source:** LED



## Product information Sheet

### General Information

Material number	9186807
Type	Pendant
Product segment	INDOOR

### Dimensions

Lenght (in cm)	108cm
Width (in cm)	32.5cm
Height (in cm)	120cm
Net Weight	

### Material & Colour

Enclosure Material	Copper
Colour	Gold
Adjustable	Adjustable Height

### Functionality

Switch Type	
Function	Non-dimmable
Battery	
Led Chip	84pcs

### Technical Information


Protection Degree	IP20
Protection Class	CLASS I
Mains Voltage	230V
max. Wattage	33,93W
Lumen	
Equivalence With Incandescent Lamp (W)	
Colour Temperature	3000K
Nominal Lifetime (in h)	30000H
Switching Cycles	-
Colour Rendering Index (Ra, CRI)	80,4
Rated Lamp Power (0,1W precision)	
Colour Tolerance (LED, SDCM)	1,0

## Product information

Lighting technology used [LED/OLED/MIXED/OTHER]	LED
Non-directional or directional [NDLS/DLS]	NDLS
Mains or non-mains [MLS/NMLS]	NMLS
Connected light source (CLS) [yes/no]	No
Colour-tuneable light source [yes/no]	No
Envelope [no/second/non-clear]	-
High luminance light source [yes/no]	No
Anti-glare shield [yes/no]	No
Dimmable [yes/only with specific dimmers/no]	No

## General Product parameters

Energy consumption in on-mode (kWh/1000h)	33,93
Energy efficiency class	F
Useful luminous flux ( $\Phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2711,09lm
Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set :	3007K
On-mode power ( $P_{on}$ ), expressed in W [x,x]	33,93W
Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0
Colour rendering index, rounded to the nearest integer , or the range of CRI values that can be set	80,4
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre):	DC12V 3014*0.2W/252PCS 3000K 20*7*2MM /PCS*84PCS
Spectral power distribution in the range 250 nm to 800 nm, at full-load	

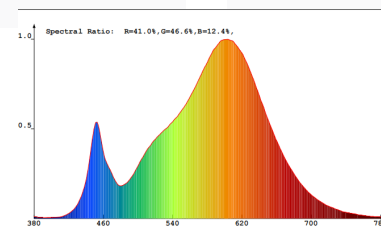

## Parameters for LED and OLED light sources

R9 colour rendering index value	-3
Survival factor [x,xx]	0,934
The lumen maintenance factor [x,xx]	96%
Displacement factor ( $\cos \phi_1$ )	0,934
Colour consistency in MacAdam ellipses	1,0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular Wattage	
If yes then replacement claim (W)	
Flicker metric (Pst Lm) [x,x]	0,000
Stroboscopic effect metric (SVM) [X,X]	0,050
Pon in W	33,93W
Displacement factor ( $\cos \phi_1$ ) for LED and OLED mains light sources	0,934
Colour consistency in MacAdam ellipse steps for LED and OLED light sources	1,0
Flicker metric (PstLM) for LED and OLED light sources	0,000
Stroboscopic effect metric (SVM) for LED and OLED light sources	0,050
Excitation purity, only for CTLS, for the following colours and dominant wavelength within the given range: Blue 440nm - 490nm, Green 520nm - 570nm, Red 610nm - 670nm	

