


# NOVA LUCE

Supplier's name or trade mark: NOVA LUCE S.A  
Supplier's address: SCHIMATARI VIOTIAS 32009, GREECE  
Model identifier: 9818231  
Type of light source: LED

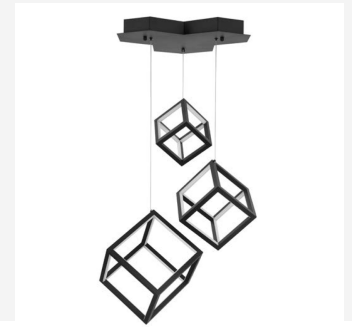

## Product information Sheet

### General Information

Material number	9818231
Type	Pendant
Product segment	INDOOR

### Dimensions

Length (in cm)	56cm
Width (in cm)	48.5cm
Height (in cm)	156cm
Net Weight	6kg

### Material & Colour

Enclosure Material	Aluminium & Silicone
Colour	Sandy Black
Adjustable	Yes

### Functionality

Switch Type	
Function	Triac Dimmable
Battery	
USB Charger	

### Technical Information

Protection Degree	IP20
Protection Class	
Mains Voltage	230V
max. Wattage	72W
Lumen	5040Lm
Equivalence With Incandescent Lamp (W)	350W
Colour Temperature	3000K
Nominal Lifetime (in h)	20000h
Switching Cycles	10000
Colour Rendering Index (Ra, CRI)	
Rated Lamp Power (0,1W precision)	72
Colour Tolerance (LED, SDCM)	95%

## Product information

Lighting technology used [LED/OLED/MIXED/OTHER]	LED
Non-directional or directional [NDLS/DLS]	NDLS
Mains or non-mains [MLS/NMLS]	MLS
Connected light source (CLS) [yes/no]	YES
Colour-tuneable light source [yes/no]	No
Envelope [no/second/non-clear]	Second
High luminance light source [yes/no]	No
Anti-glare shield [yes/no]	No
Dimmable [yes/only with specific dimmers/no]	Yes

## General Product parameters

Energy consumption in on-mode (kWh/1000h)	72W
Energy efficiency class	C
Useful luminous flux ( $\Phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5040Lm
Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set :	3000K
On-mode power ( $P_{on}$ ), expressed in W [x,x]	72
Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	not exceed 1W
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	
Colour rendering index, rounded to the nearest integer , or the range of CRI values that can be set	>73,6
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre):	
Spectral power distri bution in the range 250 nm to 800 nm, at full-load	

Claim of equivalent power (c)	
If yes, equivalent power (W)	
Chromaticity coordinates (x and y)	x=0.4707 y=0.4215

## Parameters for directional light sources

Peak luminous intensity (cd)	
Beam angle in degrees, or the range of beam angles that can be set	

## Parameters for LED and OLED light sources

R9 colour rendering index value	
Survival factor [x,xx]	
The lumen maintenance factor [x,xx]	
Displacement factor (cos $\phi_1$ )	
Colour consistency in McAdam ellipses	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular Wattage	
If yes then replacement claim (W)	
Flicker metric (Pst Lm) [x,x]	
Stroboscopic effect metric (SVM) [X,X]	
Pon in W	

