

14 Plafo>LED Aluminium Panel Range

62140AE/W/C



40W 60x60cm LED slim plafo light, IP40, suitable for residential and commercial application.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads





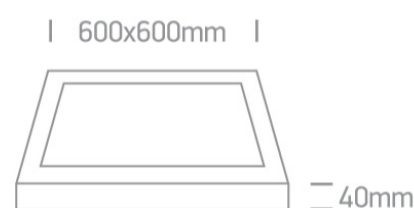

Dimensions



Physical Specification

Item Group	14 Plafo
Family	LED Aluminium Panel Range
Order Code	62140AE/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	600mm
Width	600mm
Height	42mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No


Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	950mA
Voltage	40V
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Power(Watts)	28,5-38W
Power Factor	0,9
Constant Current	Yes
950mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	40°C
Operating Temp	80°C
Housing Material	Plastic
Output Terminal	Cable
Fast Connector	Yes
Fast Connector Type	Other
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	3600lm
Light Efficiency	90lm/W
CRI	80
Illumination Diagram	

Packing Info

Box Length	65cm
Box Width	65cm
Box Height	8,5cm
Box Weight	2.600kg
Pcs/Carton	4
Carton Length	66cm
Carton Width	36cm

Carton Height	66cm
Carton Weight	15,8Kg
Barcode	5291889052159
HS Code	9405413990

Certification & Warranty

Warranty	3 years
----------	---------

switch to
one light!

one
LIGHT

