

02 Recessed Spots Fixed LED>The COB IP54 Range

10107M/W/W



7W COB LED recessed spot with IP54.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery

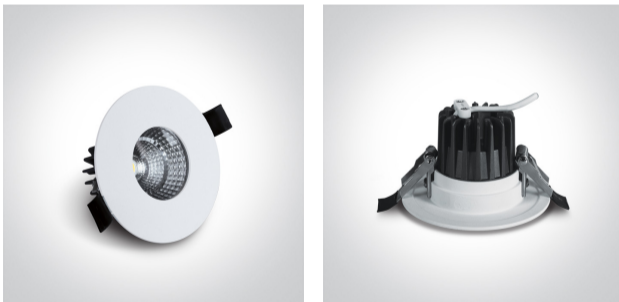

Physical Specification

Item Group

02 Recessed Spots Fixed LED

Family

The COB IP54 Range

Order Code

10107M/W/W

Colour

White

Material

Die Cast

Shape



Circular


Height

62mm

Diameter	95mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Outdoor	Yes
Adjustable	No


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	20,4V
Safety Class	
Power(Watts)	6,12W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
LED Number	1
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,2W
Power Factor	0,8
Constant Current	Yes
300mA	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	0

Illumination Data

Colour Temperature	3000K
Lumen Output	490lm
Light Efficiency	70lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	
Dark Light	Yes

Packing Info

Pcs/Carton	50
Barcode	5291889071020
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

