

02 Recessed Spots Fixed LED>The COB IP54 Dark Light Range

10108H/W/W



8W COB LED Dark light recessed Spot, IP54.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

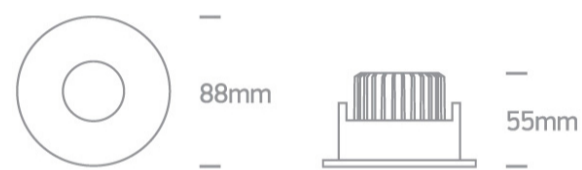

Physical Specification

| | |
|----------------------|-------------------------------|
| Item Group | 02 Recessed Spots Fixed LED |
| Family | The COB IP54 Dark Light Range |
| Order Code | 10108H/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 55mm |
| Diameter | 88mm |
| Cutout Hole Diameter | 75mm |
| Recessed Ceiling | Yes |
| Depth Required | 70mm |
| Indoor | Yes |

Outdoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

8W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

200mA

Voltage

38V

Safety Class



Power(Watts)

7,6W

IP Rating

IP54

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux


F Mark



Gear

Gear Type

Led Driver

| | |
|------------------|---|
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 5-8,4W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 200mA | 25-42V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | KEGU |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 600lm |
| Light Efficiency | 75lm/W |
| CRI | 90 |
| Beam Angle | 36° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Pcs/Carton | 50 |
| Barcode | 5291889065135 |
| HS Code | 9405409900 |

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

