

06 Downlights Fixed LED>The Frameless IP65 Range Die cast + PC

**10130CF/W**



30W LED frameless downlight, IP65. Suitable for Indoor/Outdoor installation and bathroom.

Complete with 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

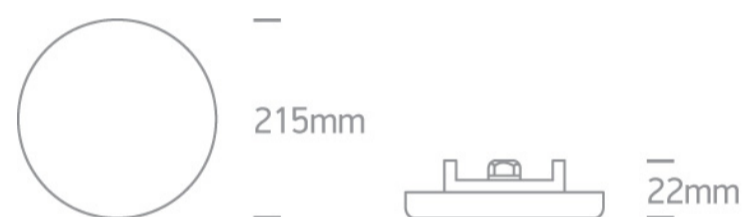

Gallery



Related items



050148/B



050148/W

Physical Specification

Item Group



06 Downlights Fixed LED

Family

The Frameless IP65 Range Die cast + PC

Order Code	10130CF/W
Colour	White
Material	Die Cast
Diffuser Material	PC
Shape	Circular
Height	22mm
Diameter	215mm
Cutout Hole Diameter	195mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

#### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current

Input Current	700mA
Voltage	36V
Safety Class	
Power(Watts)	25,2W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Zhaochi
F Mark	

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	21-28W
Power Factor	0,9
Constant Current	Yes
700mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KEGU

## Illumination Data

Colour Temperature	3000K
Lumen Output	2400lm
Light Efficiency	80lm/W
CRI	80

Beam Angle

120°

Illumination Diagram



## Packing Info

Box Length

28cm

Box Width

25cm

Box Height

3cm

Box Weight

0.770kg

Pcs/Carton

20

Carton Length

57cm

Carton Width

37cm

Carton Height

28cm

Carton Weight

15,7Kg

Barcode

5291889057123

HS Code

9405413990

## Energy Label



Energy Class

F

Energy Consumption

30kWh/1000h

## Certification & Warranty

switch to  
**one light!**

one  
LIGHT

