

04 Recessed Spots Adjustable LED>The Interchangeable Rings Range

11112H/B/W

Aluminium



12W COB LED adjustable recessed spot with interchangeable rings.

Ring must be ordered separately.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

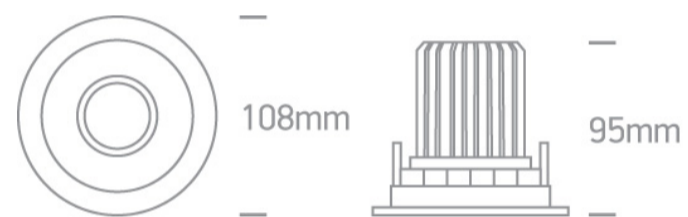

Must be ordered separately



050086/B



050086/BS



050086/G



050086/W



050086A/W

Physical Specification

Item Group

04 Recessed Spots Adjustable LED

Family

The Interchangeable Rings Range Aluminium

Order Code

11112H/B/W

Colour

Black

Material



Aluminium


Shape

Circular

Height	95mm
Diameter	108mm
Cutout Hole Diameter	90mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	1 Direction


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	36V
Safety Class	
Power(Watts)	10,8W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Cree
LED Number	1
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9-12W
Power Factor	0,9
Constant Current	Yes
300mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	Eaglerise

Illumination Data

Colour Temperature	3000K
Lumen Output	940lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	

Packing Info

Box Length	12cm
Box Width	12cm
Box Height	12cm

Box Weight	0,401Kg
Pcs/Carton	30
Barcode	5291889054078
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

