

11 Office & Kitchen>The LED Linear Range

38120L/W/W



20W LED fitting ideal for office installation, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

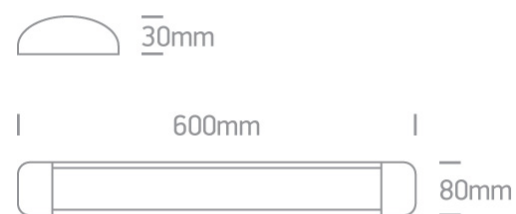

Accessories



050090

Physical Specification

Item Group

11 Office & Kitchen

Family

The LED Linear Range

Order Code

38120L/W/W

Colour

White

Material



Aluminium

Diffuser Material

PC

| | |
|-----------------|-------------|
| Shape | Rectangular |
| Length | 600mm |
| Width | 80mm |
| Height | 30mm |
| Surface Ceiling | Yes |
| Indoor | Yes |

Electrical Characteristics

| | |
|------------------|---|
| Gear | Built In |
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 20W |
| IP Rating | IP20 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

| | |
|--------------|--------------|
| Fitting | |
| Power(Watts) | 19W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Sanan |

| | |
|---------------|------------|
| Gear | |
| Gear Type | Led Driver |
| Input Voltage | 220-240V |

| |
|--------------|
| 50 Hz |
| 60 Hz |
| IP Rating |
| Safety Class |
| Dimmable |

Yes

Yes

IP20



No

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Illumination Diagram |

3000K

1700lm

85lm/W

80



Packing Info

| |
|------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

62cm

13,5cm

3,5cm

0.541kg

12

5291889052180

9405413990

Certification & Warranty

| |
|----------|
| Warranty |
|----------|

2 years

switch to
one light!

one
LIGHT

