




Product Datasheet

04 Recessed Spots Adjustable LED>The COB Adjustable Spots

51110A/AL/C

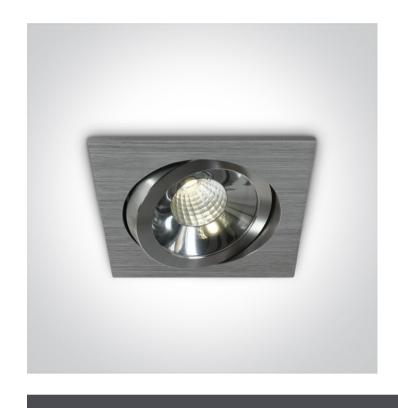

COB LED recessed spot. Very elegant design with unique design of the reflector. Ideal for replacing halogen spots.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions

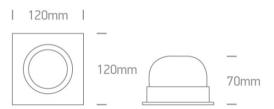

Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Adjustable Spots
Order Code	51110A/AL/C
Colour	Aluminium
Material	Aluminium
Shape	Rectangular
Length	120mm
Width	120mm
Height	70mm
Cutout Hole Diameter	100mm
Recessed Ceiling	Yes
Depth Required	100mm

Indoor	Yes
Adjustable	1 Direction
Electrical Characteristics	
Liectifical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	250mA
Voltage	38V
Safety Class	<u> </u>
Power(Watts)	9,5W
IP Rating	IP20
Light Source	LED built in
LED Brand	Citizen
LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-10W
Power Factor	0,9
Constant Current	Yes
250mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable
West and a Date	
Illumination Data	
Illumination Data	
Colour Temperature	4000K
	4000K 840lm
Colour Temperature	
Colour Temperature Lumen Output	840lm
Colour Temperature Lumen Output Light Efficiency	840lm 84lm/W
Colour Temperature Lumen Output Light Efficiency CRI	840lm 84lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	840lm 84lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	840lm 84lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	840lm 84lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	840lm 84lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	840lm 84lm/VV 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	840lm 84lm/W 80 36° The state of the sta
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	840lm 84lm/W 80 36° 15cm 14cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	840lm 84lm/VV 80 36° 15cm 14cm 9,5cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height Pcs/Carton	840lm 84lm/W 80 36° 15cm 14cm 9,5cm

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



