




Product Datasheet

07 Downlights Adjustable LED>The Box Type Shop Range

51140/B/W

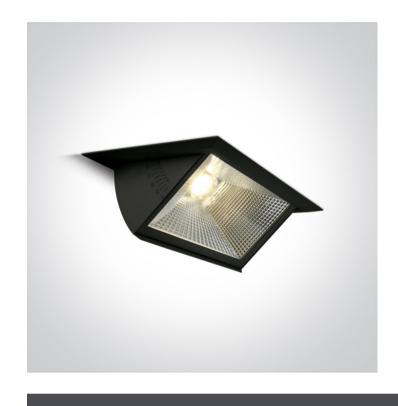

40W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads









Dimensions



Physical Specification

Item Group	07 Downlights Adjustable LED
Family	The Box Type Shop Range
Order Code	51140/B/W
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	235mm
Width	145mm
Height	110mm
Cutout Hole Width	220mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes

Depth Required	140mm
Indoor	Yes
Adjustable	1 Direction
Electrical Characteristics	
Gear	External-Included
Fitting I Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	1050mA
Voltage	35V
Safety Class	ŢIII N
Power(Watts)	37W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Sanan
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	34,65-42W
Power Factor	0,9
Constant Current	Yes
1050mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud
llumination Data	
	20001/
Colour Temperature	3000K
	3000K 3400lm
Colour Temperature	
Colour Temperature Lumen Output	3400lm
Colour Temperature Lumen Output Light Efficiency	3400lm 85lm/W
Colour Temperature Lumen Output Light Efficiency CRI	3400lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	3400lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3400lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3400lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3400lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	3400lm 85lm/W 80 70°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Pcs/Carton	3400lm 85lm/W 80 70°

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



