

07 Downlights Adjustable LED>The COB Box Type Shop Range

## 51230/B/C



2x30W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

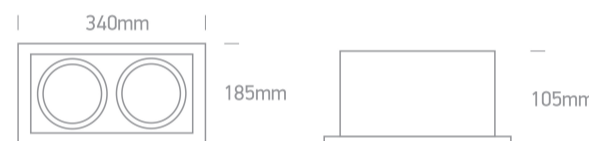

### Gallery






### Physical Specification


Item Group	07 Downlights Adjustable LED
Family	The COB Box Type Shop Range
Order Code	51230/B/C
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	340mm

Width	185mm
Height	105mm
Cutout Hole Width	320mm
Cutout Hole Length	160mm
Recessed Ceiling	Yes
Depth Required	125mm
Indoor	Yes
Adjustable	2 Directions


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	2x30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	750mA
Voltage	2x35,5V
Safety Class	
Power(Watts)	2x27W
IP Rating	IP20
Light Source	LED built in

LED Type	COB
LED Brand	Sanan
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	24,75-30W
Power Factor	0,9
Constant Current	Yes
750mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

#### Illumination Data

Colour Temperature	4000K
Lumen Output	2x2700lm
Light Efficiency	90lm/W
CRI	90
Beam Angle	38°
Illumination Diagram	

#### Packing Info

Box Weight	3.000kg
Pcs/Carton	6
Barcode	5291889061359

HS Code

9405413990

Certification & Warranty

Warranty

2 years

switch to  
**one light!**

one  
LIGHT

