




Product Datasheet

19 Wall Recessed & Inground>Ground Surface Mounted Range Die cast

69058A/G/W

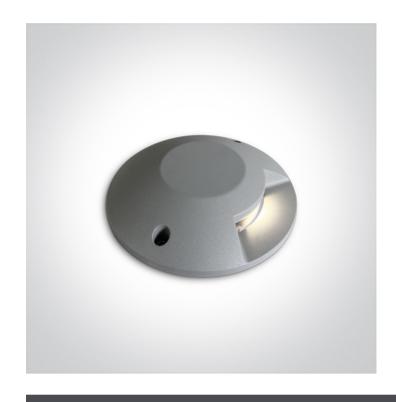

6W COB LED Surface ground, IP67 for path illumination.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Gallery



Physical Specification

Item Group	19 Wall Recessed & Inground
Family	Ground Surface Mounted Range Die cast
Order Code	69058A/G/W
Colour	Grey
Material	Die Cast
Shape	Circular
Height	42mm

Diameter	200mm
Surface Floor/Ground	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	10
Electrical Characteristics	
Electrical Characteristics Gear	Built In
	Built In
	Built In
Gear	Built In 220-240V
Gear Fitting + Driver	
Gear Fitting + Driver Input Voltage	220-240V

Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	6W
IP Rating	IP67
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	10V
Safety Class	
Power(Watts)	5W
IP Rating	IP67
Light Source	LED built in
LED Type	COB

LED Brand	Cree
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	3-6W
Power Factor	0,9
Constant Current	Yes
500mA	6-12V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Illumination Data	
Oalawa Taganagatuwa	200014
Colour Temperature	3000K
Light Efficiency	300lm
Light Efficiency CRI	50lm/W 80
Illumination Diagram	
Packing Info	
Box Weight	0.916kg
Pcs/Carton	12
Barcode	
	5291889065852
HS Code	5291889065852 9405413990

Warranty 2 years

switch to one light!

